

WAREWASHER AX-51 (MULTI POWER) DD

Multipower glass- and dishwasher. Rack size 500 mm x 500 mm and door clearance 380 mm. Power configurable to 13 / 16 / 20 / 25 amp option.





SALES DESCRIPTION

Sani-Control: guaranteed disinfection.

Embedded bodywork and easy-grip door: hygienic and ergonomic.

Exclusive Hydroblade™ washing arms: maximum effectiveness.

3-stage filtering system.

Double-walled body (partial).

Multi-power model. Default boiler loading: 2000W.

Sani-Control guarantee

- GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- √ THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.

New recessed bodywork

- √ Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- Compact tank volume (50% water saving compared to the previous range).
- ✓ Embedded basket guides.

Hydroblade™ washing arms

- Redesigned nozzles for greater washing performance.
- √ The "monoblock" design delivers durability and resistance to impacts.
- √ 30% savings in water consumption during rinsing compared to the previous range.

3-stage filter system: surface, tank and extraction

- Keeps the washing water in optimal conditions to maintain constant washing performance.
- √ The surface filters feature an "easy-on" design and can be quickly removed without having to disconnect the washing arms.

"Easy grip" door: new design with integrated door handle

- The integration of the components provides greater resistance and robustness.
- Designed to have no corners or areas that are difficult to access: prevents deposits of dirt and facilitates cleaning.

- √ Its ergonomic handle provides a perfect grip, even with wet hands.
- Double-walled door with safety microswitch and high quality seal.
- 38 cm loading capacity: high versatility for washing a wide range of items: dishes, Euronorm trays, GN 1/1 tubs and pizza plates diam 39 cm.

Warewashing, made simple

- ✓ Active Xperience: simple and intuitive use.
- Dedicated cycles: selection of the ideal washing programme using icons.
- ✓ Electronic control panel with IPXX humidity protection.

You will never WASH ALONE

- ✓ Tech Services: our team of technicians will help you so that your machine is always ready for use.
- Design Services: tell us what your needs are and we will advise you.
- √ 60 years of experience and know-how at your disposal.

INCLUDES

- ✓ Peristaltic detergent pump.
- Rinse aid pump.
- √ 1 glasses basket.
- √ 1 mixed basket (plates).
- √ 1 small basket for cutlery.

OPTIONAL

Overflow drainage pump. Tank water renewal by the principle of density. Double-level accessory for washing two baskets at the same time.

ACCESSORIES

- ☐ Manual water softeners
- Automatic water softeners
- □ 500 x 500 mm baskets□ Inserts & supplements
- ☐ High feet kit
- □ Reverse osmosis devices OS-140
- Double rack kits for AX/UX

SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm

Useful height: 380 mm

Production baskets / hour: 30 / 24 / 17 Wash temperature: 50°C - 65°C Rinse temperature: 75°C - 85°C









Multipower glass- and dishwasher. Rack size 500 mm x 500 mm and door clearance 380 mm. Power configurable to 13 / 16 / 20 / 25 amp option.

- √ Boiler capacity: 8 I
- √ Wash tank capacity: 14 I
- √ Water consumption/cycle: 2.7 I

Energy consumption

Loading_

Pump: 500 W / 0.7 Hp

Tank: 1800 W

Boiler: 2000 / 4000 / 5000 W Total loading: 2500 / 4500 / 5500 W

External dimensions (W x D x H)

√ Width:580 mm

- ✓ Depth: 635 mm
- ✓ Height: 835 mm

Noise level (1m.): <70 dB(A)

Crated dimensions


640 x 695 x 960 mm

AVAILABLE MODELS

1303189 AX-51 230/50/1 DD

1303190 AX-51B 230/50/1 DD

* Ask for special versions availability

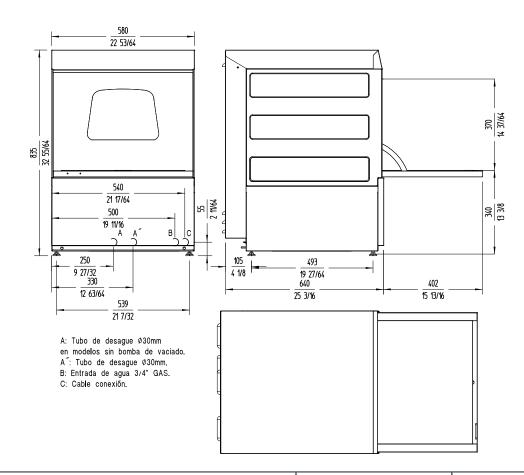



sammic.co.uk

Food Service Equipment Manufacturer
Unit 2, Trevanth Road
Troon Industrial Park

uksales@sammic.com Tel.: +44 0116 246 1900



Project	Date
Item	Qty

Approved