



PASS-THROUGH WAREWASHER UX-130BC

Pass-through glass- and dishwasher. Rack size 500 mm x 500 mm and door clearance 430 mm.



WARE WASHING
PASS-THROUGH WAREWASHERS



SALES DESCRIPTION

- ✓ Top panel.
- ✓ Sani-Control: guaranteed disinfection.
- ✓ Exclusive Hydroblade™ washing arms: maximum effectiveness.
- ✓ 3-stage filtering system.

Sani-Control guarantee

- ✓ GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- ✓ THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.
- ✓ CONSTANT HIGH TEMPERATURE RINSE system for optimal disinfection.
- ✓ The PRESSURE PUMP guarantees effective high-pressure rinsing
- ✓ WRAS certified.

New recessed bodywork

- ✓ Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- ✓ Compact tank volume (50% water saving compared to the previous range).

Hydroblade™ washing arms

- ✓ Redesigned nozzles for greater washing performance.
- ✓ The “monoblock” design delivers durability and resistance to impacts.
- ✓ 30% savings in water consumption during rinsing compared to the previous range.

3-stage filter system: surface, tank and extraction

- ✓ Keeps the washing water in optimal conditions to maintain constant washing performance.

Designed to last

- ✓ “Flow” opening mechanism: allows the hood to be raised with less effort
- ✓ High load capacity 43 cm: suitable for GN 1/1 and Euronorm
- ✓ Stainless steel surface filters for greater stability and resistance during intensive use

Premium warewashing

- ✓ Soft start: progressive start-up of the washing pump to protect fragile items.
- ✓ Top panel: it allows quick and intuitive reading of information, ideal for corner installations.
- ✓ Colour LCD Display: intuitive communication of the machine status by means of messages, colour codes and icons.
- ✓ Dedicated cycles: selection of the ideal washing programme using icons.
- ✓ Adaptable: allows the main parameters of the machine to be adjusted to the needs of each user.
- ✓ TEMPERATURE DISPLAY
- ✓ Wash Plus+ function: increases the intensity of the wash cycle for greater cleaning performance
- ✓ Control panel with IP65 humidity protection.

You will never WASH ALONE

- ✓ Tech-Services: our team of technicians will help you so that your machine is always ready for use.
- ✓ Design Services: tell us what your needs are and we will advise you.
- ✓ 60 years of experience and know-how at your disposal.

INCLUDES

- | | |
|--|----------------------------|
| ✓ Peristaltic detergent pump. | ✓ Rinse aid pump. |
| ✓ Drainage pump with level sensor. Proactive tank water renewal. | ✓ 1 glasses basket. |
| ✓ Type-A air break. WRAS approved break tank. | ✓ 1 mixed basket (plates). |
| | ✓ 1 cutlery basket. |

ACCESSORIES

- | | |
|--|--|
| ☐ Tables for pass-through dishwashers | ☐ Prewashing tables for pass-through and rack conveyor dishwashers |
| ☐ Manual water softeners | ☐ Connecting tables for pass-through dishwashers and rack conveyors |
| ☐ Automatic water softeners | ☐ Reverse osmosis devices OS-140 |
| ☐ 500 x 500 mm baskets | ☐ Dosing equipments for AX / UX hood-type dishwashers |
| ☐ Inserts & supplements | |
| ☐ Central sorting tables | |
| ☐ Double connection central sorting table | |





PASS-THROUGH WAREWASHER UX-130BC

Pass-through glass- and dishwasher. Rack size 500 mm x 500 mm and door clearance 430 mm.



SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm

Useful height: 430 mm

Cycles: 6

Cycle duration: 60 / 90 / 100 / 150 / 210"

Production baskets / hour: 60 / 40 / 36 / 24 / 17

Boiler capacity: 12 l

Wash tank capacity: 25 l

Consumption and savings

✓ Water consumption/cycle: 2.8 l

✓ Automatic saving mode in: 25'

✓ Automatic switch-off: 120'

Energy consumption

Loading__

✓ Pump: 1000 W / 1.3 Hp

✓ Tank: 3000 W

✓ Boiler: 9000 W

✓ Total loading: 10000 W

External dimensions (W x D x H)

✓ Width: 650 mm (Wide with handle: 725 mm)

✓ Depth: 755 mm (Bottom with handle: 835 mm)

✓ Height: 2070 mm / 1600 mm

Temperature

✓ Wash temperature: 71°C

✓ Rinse temperature: 87°C

Noise level (1m.): <70 dB(A)

Crated dimensions

760 x 860 x 1630 mm


Gross weight: 133 kg

AVAILABLE MODELS

1303430 UX-130BC 400/50/3N DD

1303428 UX-130BC 220/60/1 DD

* Ask for special versions availability

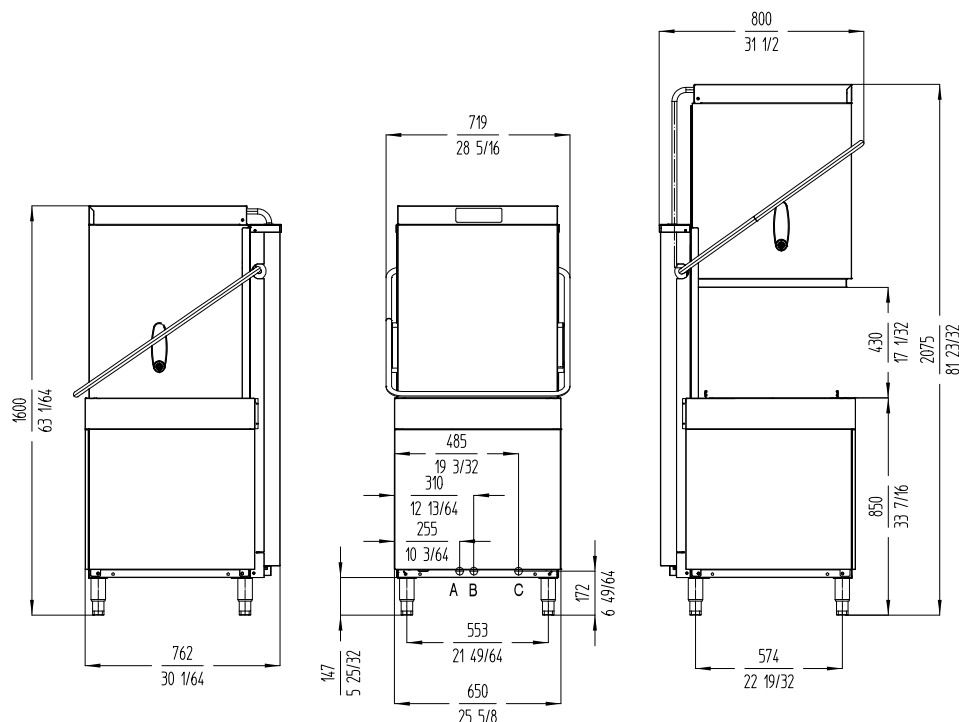

A: Entrada de agua 3/4" GAS
B: Tubo de desague
C: Cable conexión



sammic.co.uk

Food Service Equipment Manufacturer

Unit 2, Trevanah Road

Troon Industrial Park

LE4 9LS - Leicester

uksales@sammic.com

Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved

product sheet
updated 03/11/2025